

TI-ZAS

designed by
FERNANDO MARTÍNEZ





Using aluminum and polycarbonate extrusion, we have created these minimalist “chalk strokes” illuminated by PCB-LED technology. Their modular nature allows for multiple combinations, adapting to any space with creativity and style.

Con la extrusión del aluminio y del policarbonato hemos creado estos “trazos de tiza” de diseño minimalista, iluminados mediante PCB-LED. Su carácter modular permite múltiples combinaciones, adaptándose a cualquier espacio con creatividad y estilo.

TI-ZAS
REF. 27041/100

TI-ZAS
REF. 27041/125

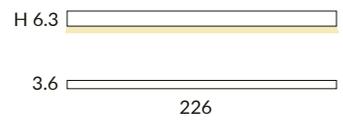TI-ZAS
REF. 27041/150

TI-ZAS
REF. 27041/225

CEILING LAMP / PLAFÓN
IP20
MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Profile / Perfil:

Black, white, sand, olive or
terracotta / Negro, blanco,
arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 17.2W 700mA CRI ≥ 90
- 2700K 1233lm
- 3000K 1284lm
- 4000K 1344lm

CEILING LAMP / PLAFÓN
IP20
MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Profile / Perfil:

Black, white, sand, olive or
terracotta / Negro, blanco,
arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 21.5W 700mA CRI ≥ 90
- 2700K 1541lm
- 3000K 1605lm
- 4000K 1680lm

Ⓧ dim DALI

Ⓧ dim PUSH

Ⓧ dim Casambi

CEILING LAMP / PLAFÓN
IP20
MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Profile / Perfil:

Black, white, sand, olive or
terracotta / Negro, blanco,
arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 25.8W 700mA CRI ≥ 90
- 2700K 1849lm
- 3000K 1926lm
- 4000K 2006lm

Ⓧ dim DALI

Ⓧ dim PUSH

Ⓧ dim Casambi

CEILING LAMP / PLAFÓN
IP20
MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Profile / Perfil:

Black, white, sand, olive or
terracotta / Negro, blanco,
arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN


PCB-LED 38.7W 700mA CRI ≥ 90
- 2700K 2774lm
- 3000K 2889lm
- 4000K 3024lm

Ⓧ dim DALI


Ⓧ dim PUSH

Ⓧ dim Casambi


TI-ZAS
REF. 27841/125

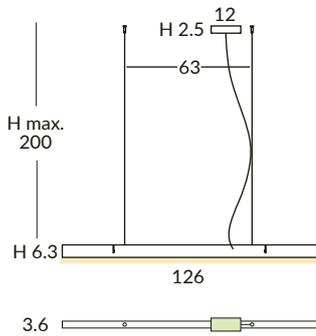

TI-ZAS
REF. 27841/150

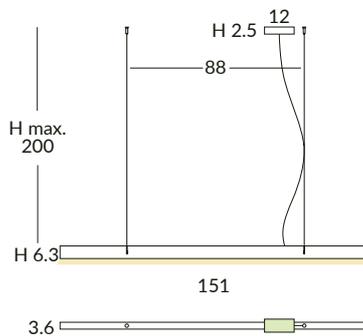

TI-ZAS
REF. 27841/225

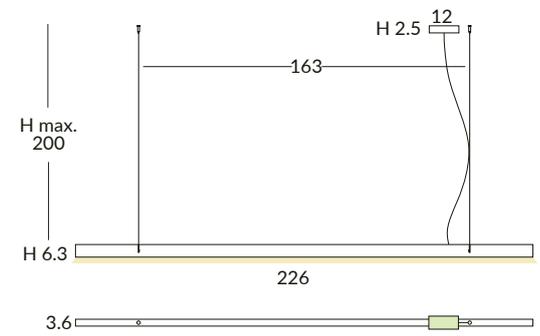

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate/
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta /
Negro, blanco, arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 21.5W 700mA CRI ≥ 90

- 2700K 1541lm

- 3000K 1605lm

- 4000K 1680lm

Ⓧ dim DALI

Ⓟ dim PUSH

Ⓒ dim Casambi

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate/
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta /
Negro, blanco, arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 25.8W 700mA CRI ≥ 90

- 2700K 1849lm

- 3000K 1926lm

- 4000K 2006lm

Ⓧ dim DALI

Ⓟ dim PUSH

Ⓒ dim Casambi

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate/
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta /
Negro, blanco, arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB-LED 38.7W 700mA CRI ≥ 90

- 2700K 2774lm

- 3000K 2889lm

- 4000K 3024lm


Ⓧ dim DALI

Ⓟ dim PUSH

Ⓒ dim Casambi


For Dim options, canopy size / Para opciones regulables, tamaño del florón: 41 x 6 x 3,5 cm

TI-ZAS
REF. 27841/125S

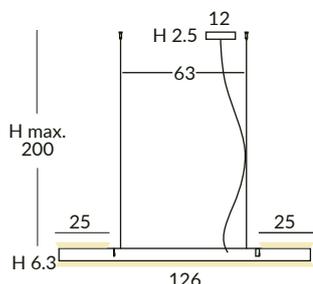


With indirect lighting / Con luz indirecta

TI-ZAS
REF. 27841/150S

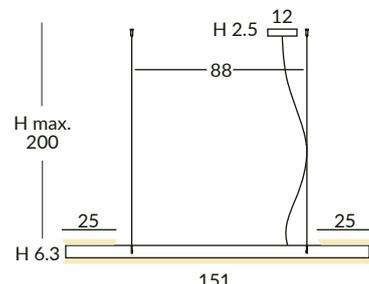

With indirect lighting / Con luz indirecta

TI-ZAS
REF. 27841/225S

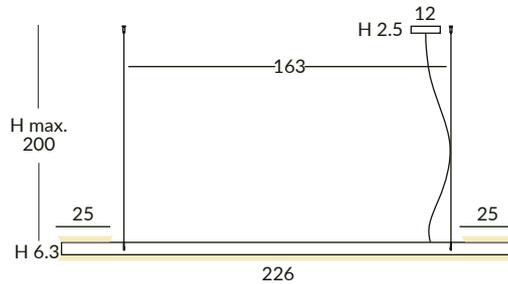

With indirect lighting / Con luz indirecta

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta /
Negro, blanco, arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB LED 301W 700mA

- 2700K 2157lm

- 3000K 2247lm

- 4000K 2352lm

Ⓧ dim DALI

Ⓟ dim PUSH

Ⓞ dim Casambi

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta / Negro,
blanco, arena, oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB LED 344W 700mA

- 2700K 2465lm

- 3000K 2568lm

- 4000K 2688lm

Ⓧ dim DALI

Ⓟ dim PUSH

Ⓞ dim Casambi

SUSPENSION / COLGANTE
IP20

MATERIAL

Aluminium and polycarbonate /
Aluminio y policarbonato

FINISHES / ACABADOS

Canopy / Florón:

White / Blanco

Cable:

Transparent / Transparente

Profile / Perfil:

Black, white, sand, olive or terracotta / Negro, blanco, arena,
oliva o teja

Diffuser / Difusor:

Optic white / Blanco óptico

INSTALLATION / INSTALACIÓN

PCB LED 47.3W 700mA

- 2700K 3390lm

- 3000K 3531lm

- 4000K 3696lm

Ⓧ dim DALI

Ⓟ dim PUSH

Ⓞ dim Casambi

For Dim options, canopy size / Para opciones regulables, tamaño del florón: 41 x 6 x 3,5 cm




Color options



Green / Verde
RAL 6013



White / Blanco
RAL 9016

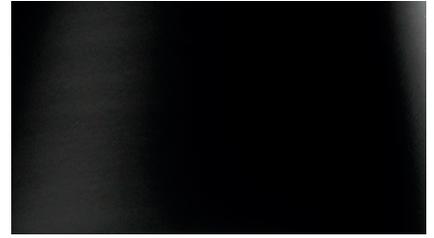

Black / Negro
RAL 9005



Sand / Arena
RAL 1019



Terracotta / Teja
RAL 8004

Ask factory for customized finishes. / *Acabados personalizados consultar con fábrica.*